



PANAGET

manufacture française de parquet
DEPUIS 1929



Elegant browns

N° 1021883

FRENCH OAK ZENITUDE ARGILE, DIVA 184 CLICK / 12 MM

Characteristics

Specie: French oak **Origin:** France

Grade: Zenitude - Light and dark wood, black knots, filled knots, partially opened knots, traces of discolouration, cracks, splits, heartwood, sapwood. Grade with all peculiarities of the wood without limitation. The size of the knots is proportional to the width of the planks.

Finish: Argile - brushed, clay-tone matt lacquered / Ecostrong matt lacquer - Gloss: 4/6

Argile est une teinte à base de vieillisseur naturel qui agit sur le tanin du bois. Dans certains cas, une légère variation de teinte dans le temps peut être observée.

Design

Engineered extra-wide single plank made under the patent EN 13489
Click made under Unilin patent n°EP1640530



Description

Width: 184 mm
Length: 495 to 1992 mm
Thickness: 12 mm
Top layer: 2.5 mm
Core: HDF*
Counterbalance: unrolled wood
Profile: 2 bevels

*High Density Fiber board

Packaging

sqm/pack: 2.20
Pack/pallet: 40
sqm/pallet: 88.00
Weight/sqm: 9.9 kg
Weight/pallet: 871.2 kg



if installation and maintenance rules are followed

Installation method



Glue-free floating under the patent DTU 51.11




Glue down installation under the patent DTU 51.2




Floating installation using plastic DM and Isol 20 or fully glue down using Presto PM



Fully glue down Presto PM



*Emissions of volatile substances which could be toxic if inhaled. These are rated on scale from A+ (very low) to C (high).



PANAGET - 3 rue d'Orgères - 35230 Bourgarré - FRANCE
tel: +33 (0)2 99 05 77 77 // fax: +33 (0)2 99 57 73 55 // www.panaget.com



DECLARATION OF PERFORMANCE

N° 1021883

Unique identification code of product-type: Diva 184 Click, 12 mm, French oak

Intended use/es: Engineered single plank made under the patent EN 13489

Glue-free floating under the patent DTU 51.11

Manufacturer: PANAGET - 3 rue d'Orgères 35230 Bourgbarré / FRANCE

System/s of Assessment and Verification of Constancy of Performance: n°4

Harmonised standard: EN 14342 : 2013

Declared performances:

Essential features	Performances	Appropriate Technical Documentation and/or Specific Technical Documentation
Reaction of fire	Dfl-s1	EN 14342 : 2013
Features for this classification: - Average minimum density (Kg/m ³) - Average thickness (mm) - Intended use, fitting mode	500 12 Floating fit	
Formaldehyde emission	E1	
Content of pentachlorophenol	PCP ≤ 5 ppm	-
Release of other dangerous substances: - VOC* emissions (Decree No 2011-321) - CMR 1&2** emissions (Decree No DEVP0910046A)	Class A+ < 1µg/m ³	ISO 16000
Breaking strength	N/A	-
Slipperiness	N/A	-
Thermal conductivity (W/m.K)	0.15	EN 14342 / Chapter 4.7
Thermal resistance (m ² .K/W)	0.080	
Biological sustainability	Class 1	EN 335
RE2020 - Building Carbon Index	3 kg.CO ₂ /m ²	-
FDES 2022 - Life Cycle impact assessment	8.6 kg éq. CO ₂ /m ²	-

N/A : Not Applicable

*VOC: Volatile Organic Compounds


**CMR 1&2: Carcinogenics, Mutagens or Reproductive toxin of 1&2 category.

The performances of product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 under the sole responsibility of the manufacturer identified above.

Signed for and behalf of the manufacturer by: Carole FRANÇOIS - Executive Director

Bourgbarré, January 27th 2025

Carole FRANÇOIS

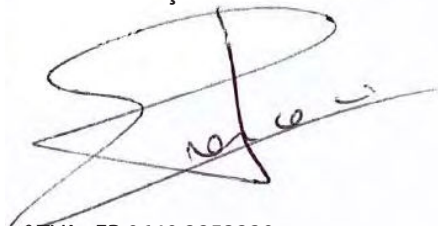

3 rue d'Orgères - 35230 Bourgbarré - FRANCE / tel: +33 (0)2 99 05 77 77 - fax: +33 (0)2 99 57 73 55

Entreprise dont le système qualité a été certifié ISO 9001 par Bureau Veritas Certification.

SAS au capital de 4 957 200 € - RCS Rennes B 402 853 220 - Siret : 402 853 220 000 34 - APE : 1622 Z - n° TVA : FR 0640 2853220

www.panaget.com