



Timeless natural hues

N° 1021339

FRENCH OAK ZENITUDE AMANDE, DIVA 139 CLICK / 12 MM

Charateristics

Specie: French oak **Origin :** France

Grade: Zenitude - Light and dark wood, black knots, filled knots, partially opened knots, traces of discolouration, cracks, splits, traces of heartwood, sapwood. Grade with all the peculiarities of the wood without limitation. The size of the knots is proportional to the width of the planks.


Finish: Amande - natural brushed, slightly ceruse oiled / Oil - Brillance (gloss) : 4/8

For oiled wood floors, apply a thin coat of Panaget maintenance oil right after installation. Please refer to our maintenance guide.

Design

Engineered wide single plank made under patent EN 13489

Click made under Unilin patent n°EP1640545

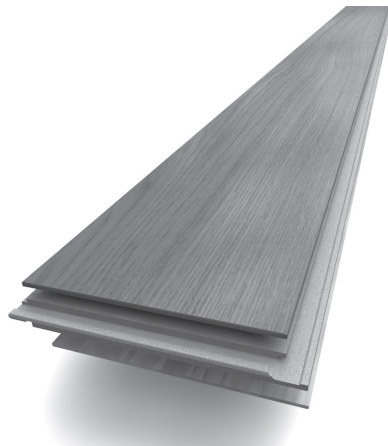

Description

Width: 139 mm

Length: 495 to 1992 mm

Thickness: 12 mm

Top layer: 2,5 mm

Core: HDF*

Couterbalance: unrolled wood

Profile: 4 bevels

*High Density Fiber board

Packaging

sqm/pack: 1,38

Pack/pallet: 65

sqm/pallet: 89,70

Weight/sqm: 9,9 kg

Weight/pallet: 888,0 kg



if installation and maintenance rules are followed

Class of use:

31 R1



Installation method



Glue-free floating under the patent DTU 51.11



Glue down installation under the patent DTU 51.2



Floating installation using plastic DM and Isol 20 or fully glue down using Presto PM



Fully glue down Presto PM



*Emissions of volatile substances which could be toxic if inhaled. These are rated on scale from A+ (very low) to C (high).



PANAGET - 3 rue d'Orgères - 35230 Bourgbarré - FRANCE
tel: +33 (0)2 99 05 77 77 // fax: +33 (0)2 99 57 73 55 // www.panaget.com



DECLARATION OF PERFORMANCE

N° 1021339

Unique identification code of product-type: DIVA 139 Click, 12 mm, French oak

Intended use/es: Engineered single plank made under the patent EN 13489

Glue-free floating under the patent DTU 51.11

Manufacturer: PANAGET - 3 rue d'Orgères 35230 Bourgbarré / FRANCE

System/s of Assessment and Verification of Constancy of Performance: n°4

Harmonised standard: EN 14342 : 2013

Declared performances:

Essential features	Performances	Appropriate Technical Documentation and/or Specific Technical Documentation	
Reaction of fire	Dfl-s1	EN 14342 : 2013	
Features for this classification: - Average minimum density (Kg/m3) - Average thickness (mm) - Intended use, fitting mode	500 12 Floating fit		
Formaldehyde emission	E1		EN 717-1
Content of pentachlorophenol	PCP ≤ 5 ppm		-
Release of other dangerous substances: - VOC* emissions (Decree No 2011-321) - CMR 1&2** emissions (Decree No DEVP0910046A)	Classe A+ < 1µg/m ³	ISO 16000	
Breaking strengthe	NPD	-	
Slipperiness	NPD	-	
Thermal conductivity (W/m.K)	0,15	EN 14342 / Chapter 4.7	
Thermal resistance (m2.K/W)	0,080		
Biological sustainability	Class 1	EN 335	
RE2020 - Building Carbon Index	3 kg.CO ₂ /m ²	-	
FDES 2022 - Life Cycle impact assessment	8,6kg éq. CO ₂ /m ²	-	

N/A : Not Applicate

*VOC: Volatile Organic Compounds

**CMR 1&2: Carcinogenics, Mutagens or Reproductive toxin of 1&2 category.

The performances of product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 under the sole responsibility of the manufacturer identified above.

Signed for and behalf of the manufacturer by: Carole FRANÇOIS - Executive Director

Bourgbarré, 14 January 2026
Carole FRANÇOIS

