PANAGET
manufacture française de parquet
DEPUIS 1929

Timeless natural hues

N° 1021966

FRENCH OAK CLASSIC BOIS NATUREL OIL, DIVA 139 CLICK / 12 MM

Charateristics

Specie: French oak **Origin :** France

Grade: **Classic** - Light and dark wood, black knots, medular rays, traces of discolouration.

Finish: Bois naturel oil - brushed, matt oiled with unfinished aspect / Oil - Brillance (gloss) : 4/8
For oiled wood floors, apply a thin coat of Panaget maintenance oil right after installation. Please refer to our maintenance guide.

Design

Engineered wide single plank made under patent EN 13489
Click made under Unilin patent n°EP1640537

Description

Width: 139 mm
Length: 495 to 1992 mm
Thickness: 12 mm
Top layer: 2,5 mm
Core: HDF*
Couterbalance: unrolled wood
Profile: 4 bevels

*High Density Fiber board

Packaging

sqm/pack: 1,38
Pack/pallet: 65
sqm/pallet: 89,70
Weight/sqm: 9,9 kg
Weight/pallet: 888,0 kg

if installation and maintenance rules are followed

Class of use:

31 R1



Installation method

Glue-free floating under the patent DTU 51.11

Glue down installation under the patent DTU 51.2

Floating installation using plastic DM and Isol 20 or fully glue down using Presto PM

Fully glue down Presto PM

PEFC Certified
This product is from sustainably managed forests and controlled sources
www.pefc.org
PEFC 10-35-39

PARQUETS DE FRANCE
PARQUETFRANÇAIS.ORG



*Emissions of volatile substances which could be toxic if inhabited. These are rated on scale from A+ (very low) to C (high).

GUARANTEE 30 YEARS CONCEPTION

REACH COMPLIANCE
Registration, Evaluation, Authorisation of Chemicals.

100% French oak designed with a French touch PANAGET

PANAGET - 3 rue d'Orgères - 35230 Bourgbarré - FRANCE
tel: +33 (0)2 99 05 77 77 // fax: +33 (0)2 99 57 73 55 // **www.panaget.com**

PANAGET
manufacture française de parquet
DEPUIS 1929

DECLARATION OF PERFORMANCE

N° 1021966

CE

Unique identification code of product-type: DIVA 139 Click, 12 mm, French oak

Intented use/es: Engineered single plank made under the patent EN 13489

Glue-free floating under the patent DTU 51.11

Manufacturer: PANAGET - 3 rue d'Orgères 35230 Bourgbarré / FRANCE

System/s of Assessment and Verification of Constancy of Performance: n°4

Harmonised standard: EN 14342 : 2013

Declared performances:

Essential features	**Performances**	**Appropriate Technical Documentation and/or Specific Technical Documentation**
Reaction of fire	Dfl-s1	EN 14342 : 2013
Features for this classification: - Average minimum density (Kg/m3) - Average thickness (mm) - Intented use, fitting mode	 500 12 Floating fit	
Formaldehyde emission	E1	EN 717-1
Content of pentachlorophenol	PCP ≤ 5 ppm	-
Release of other dangerous substances: - VOC* emissions (Decree No 2011-321) - CMR 1&2** emissions (Decree No DEVP0910046A)	 Classe A+ < 1µg/m^3	ISO 16000
Breaking strengthe	NPD	-
Slipperiness	NPD	-
Thermal conductivity (W/m.K)	0,15	EN 14342 / Chapter 4.7
Thermal resistance (m2.K/W)	0,080	
Biological sustainability	Class 1	EN 335
RE2020 - Building Carbon Index	3 kg.CO_2/m^2	-
FDES 2022 - Life Cycle impact assessment	8,6kg éq. CO_2/m^2	-

N/A : Not Applicate
**VOC: Volatile Organic Compounds*
***CMR 1&2: Carcinogenics, Mutagens or Reproductive toxin of 1&2 category.*

The performances of product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 under the sole responsability of the manufacturer identified above.

Signed for and behalf of the manufacturer by: Carole FRANÇOIS - Executive Director

Bourgbarré, 14 January 2026
Carole FRANÇOIS

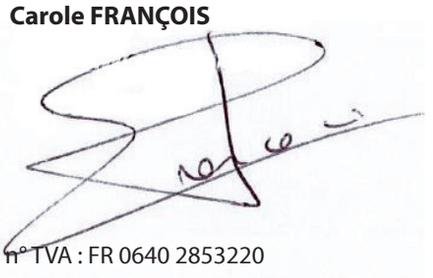

3 rue d'Orgères - 35230 Bourgbarré - FRANCE / tel: +33 (0)2 99 05 77 77 - fax: +33 (0)2 99 57 73 55
Entreprise dont le système qualité a été **certifié ISO 9001** par Bureau Veritas Certification.
SAS au capital de 4 957 200 € - RCS Rennes B 402 853 220 - Siret : 402 853 220 000 34 - APE : 1622 Z - n° TVA : FR 0640 2853220
www.panaget.com