



Timeless natural hues

N° 1019711

FLAMED BEECH SATIN, DIVA 139 CLICK / 14 MM

Charateristics


Specie: Flamed beech **Origin :** France

Grade: - Flamed red wood, light and dark wood, knots, all peculiarities accepted

Finish: Satin - unbrushed, satin lacquered / Satin lacquer - Brillance (gloss) : 28/32

Design

Engineered wide single plank made under patent EN 13489
Click made under Unilin patent n°EP1640575

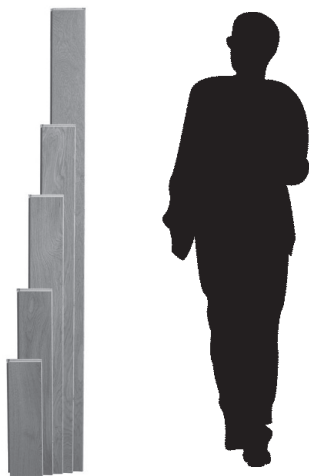

Description

Width: 139 mm
Length: 495 to 1992 mm
Thickness: 14 mm
Top layer: 3,4 mm
Core: HDF*
Couterbalance: unrolled wood
Profile: 4 bevels

*High Density Fiber board

Packaging

sqm/pack: 1,38
Pack/pallet: 55
sqm/pallet: 75,90
Weight/sqm: 11,6 kg
Weight/pallet: 880,4 kg



if installation and maintenance rules are followed

Class of use:
31 R2



Installation method




Glue-free floating under the patent DTU 51.11




Glue down installation under the patent DTU 51.2



Fully glue down using our special Presto PM glue.



*Emissions of volatile substances which could be toxic if inhaled. These are rated on scale from A+ (very low) to C (high).



DECLARATION OF PERFORMANCE

N° 1019711



Unique identification code of product-type: DIVA 139 Click, 14 mm, Flamed beech

Intended use/es: Engineered single plank made under the patent EN 13489

Glue-free floating under the patent DTU 51.11

Manufacturer: PANAGET - 3 rue d'Orgères 35230 Bourgbarré / FRANCE

System/s of Assessment and Verification of Constancy of Performance: n°4

Harmonised standard: EN 14342 : 2013

Declared performances:

Essential features	Performances	Appropriate Technical Documentation and/or Specific Technical Documentation	
Reaction of fire	Dfl-s1	EN 14342 : 2013	
Features for this classification: - Average minimum density (Kg/m ³) - Average thickness (mm) - Intended use, fitting mode	500 14 Floating fit		
Formaldehyde emission	E1		EN 717-1
Content of pentachlorophenol	PCP ≤ 5 ppm		-
Release of other dangerous substances: - VOC* emissions (Decree No 2011-321) - CMR 1&2** emissions (Decree No DEVP0910046A)	Classe A+ < 1µg/m ³	ISO 16000	
Breaking strengthe	NPD	-	
Slipperiness	NPD	-	
Thermal conductivity (W/m.K)	0,15	EN 14342 / Chapter 4.7	
Thermal resistance (m ² .K/W)	0,093		
Biological sustainability	Class 1	EN 335	
RE2020 - Building Carbon Index	3 kg.CO ₂ /m ²	-	
FDES 2022 - Life Cycle impact assessment	8,6kg éq. CO ₂ /m ²	-	

N/A : Not Applicate


*VOC: Volatile Organic Compounds

**CMR 1&2: Carcinogenics, Mutagens or Reproductive toxin of 1&2 category.

The performances of product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 under the sole responsibility of the manufacturer identified above.

Signed for and behalf of the manufacturer by: Carole FRANÇOIS - Executive Director

Bourgbarré, 14 January 2026
Carole FRANÇOIS

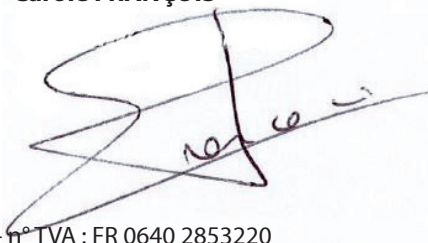

3 rue d'Orgères - 35230 Bourgbarré - FRANCE / tel: +33 (0)2 99 05 77 77 - fax: +33 (0)2 99 57 73 55

Entreprise dont le système qualité a été certifié ISO 9001 par Bureau Veritas Certification.

SAS au capital de 4 957 200 € - RCS Rennes B 402 853 220 - Siret : 402 853 220 000 34 - APE : 1622 Z - n° TVA : FR 0640 2853220

www.panaget.com